


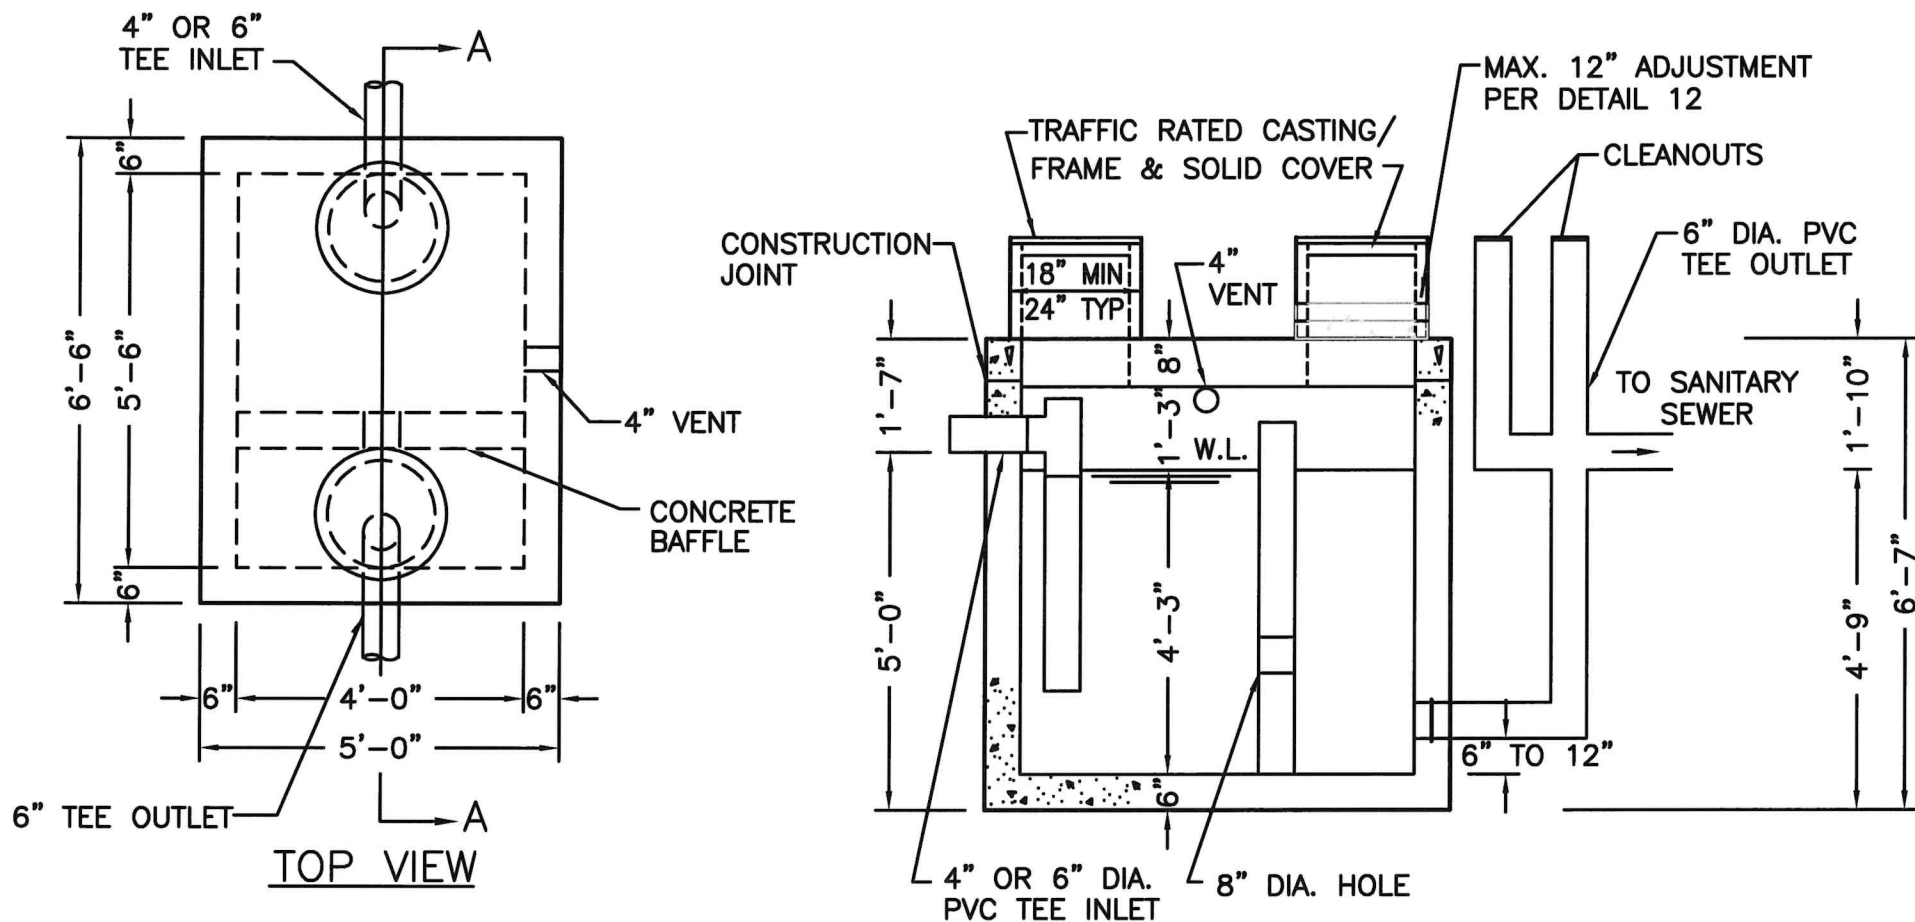

NOTES:

1. REINFORCED PRECAST CONCRETE SHALL HAVE A COMPRESSIVE STRENGTH OF 5000 PSI AT 28 DAYS.
2. CONSTRUCTION JOINT TO BE SEALED WITH 1" CONSEAL CS-101 SEALANT.
3. VENT SHALL BE TERMINATED OUTSIDE AND ABOVE THE HIGHEST FLOOR DRAIN. THE VENT SHALL BE SITUATED SO THAT NO SURFACE WATER ENTERS.
4. ALL PVC PIPES SHALL CONFORM TO ASTM D3034
5. ALL PIPE PENETRATIONS SHALL CONFORM TO ASTM C923 AND SHALL BE A-LOK, KOR-N-SEAL OR APPROVED EQUAL.

(BASED ON MACK INDUSTRIES GREASE TRAP TANK)

- ## SECTION A-A
6. BOTTOM OUTLET REQUIRED AS SHOWN TO PREVENT REMOVAL OF AN INTERNAL OUTLET TEE.
 7. CLEANOUTS MUST BE INSTALLED TO FACILITATE BLOCKAGE REMOVAL IN EITHER DIRECTION.

500 GALLON OIL & WATER SEPARATOR HEAVY DUTY


DRAWN BY: ARM

SCALE: 3/8"=1'-0"

DRAWING NO.:

DATE: 10/6/2015

REV: 5/01/2024

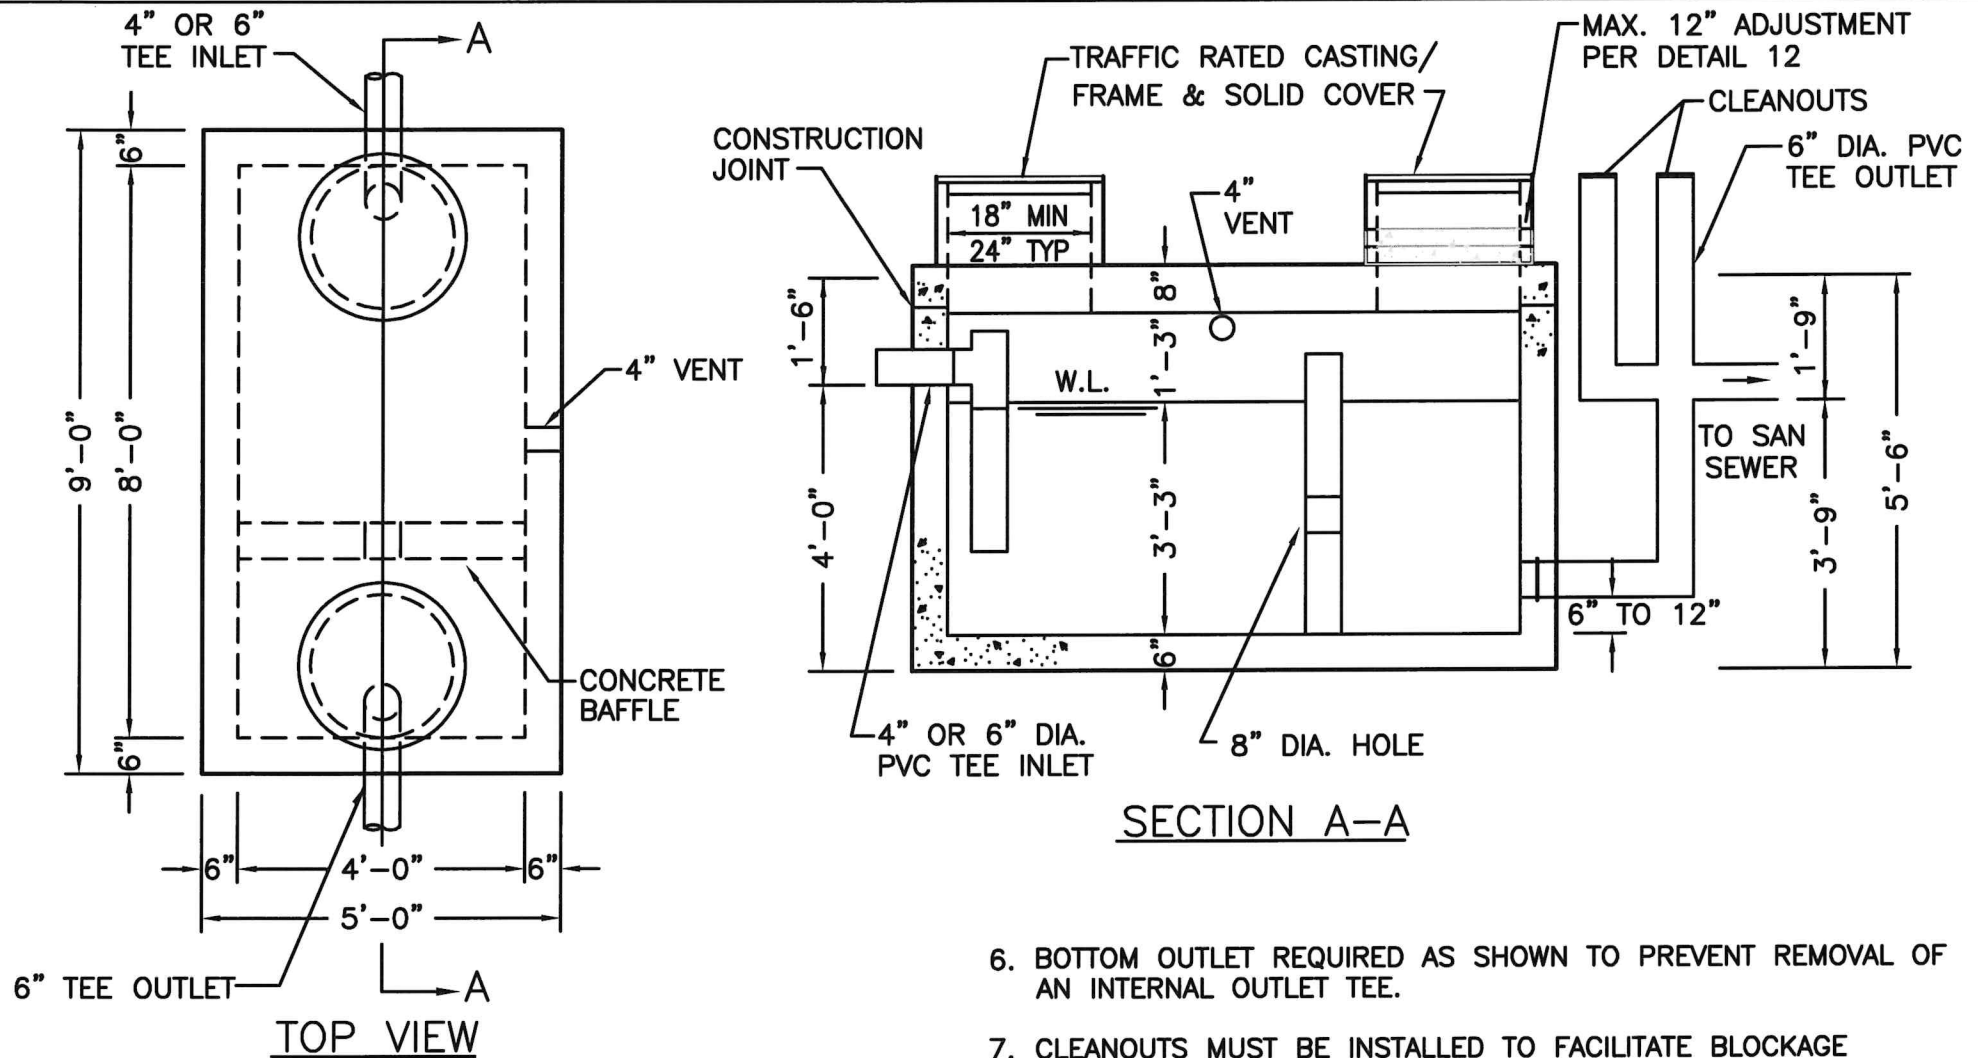

NOTES:

1. REINFORCED PRECAST CONCRETE SHALL HAVE A COMPRESSIVE STRENGTH OF 5000 PSI AT 28 DAYS.
2. CONSTRUCTION JOINT TO BE SEALED WITH 1" CONSEAL CS-101 SEALANT.
3. VENT SHALL BE TERMINATED OUTSIDE AND ABOVE THE HIGHEST FLOOR DRAIN. THE VENT SHALL BE SITUATED SO THAT NO SURFACE WATER ENTERS.
4. ALL PVC PIPES SHALL CONFORM TO ASTM D3034
5. ALL PIPE PENETRATIONS SHALL CONFORM TO ASTM C923 AND SHALL BE A-LOK, KOR-N-SEAL OR APPROVED EQUAL.

6. BOTTOM OUTLET REQUIRED AS SHOWN TO PREVENT REMOVAL OF AN INTERNAL OUTLET TEE.
7. CLEANOUTS MUST BE INSTALLED TO FACILITATE BLOCKAGE REMOVAL IN EITHER DIRECTION.

(BASED ON MACK INDUSTRIES GREASE TRAP TANK)

**750 GALLON OIL & WATER SEPARATOR
HEAVY DUTY**

DRAWN BY: ARM



SCALE: 3/8"=1'-0"

DRAWING NO.:

DATE: 10/6/2015

REV: 5/01/2024

TOP VIEW

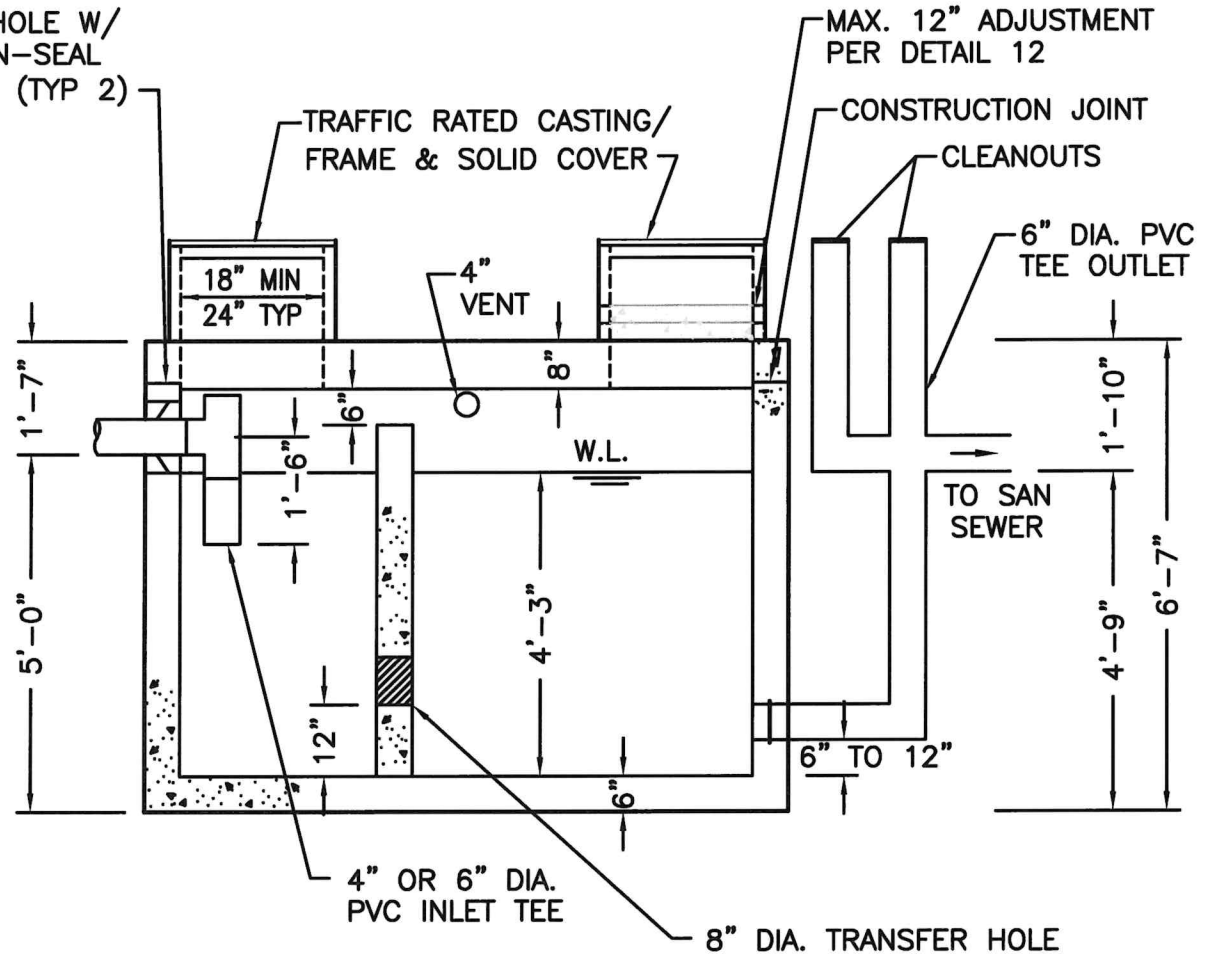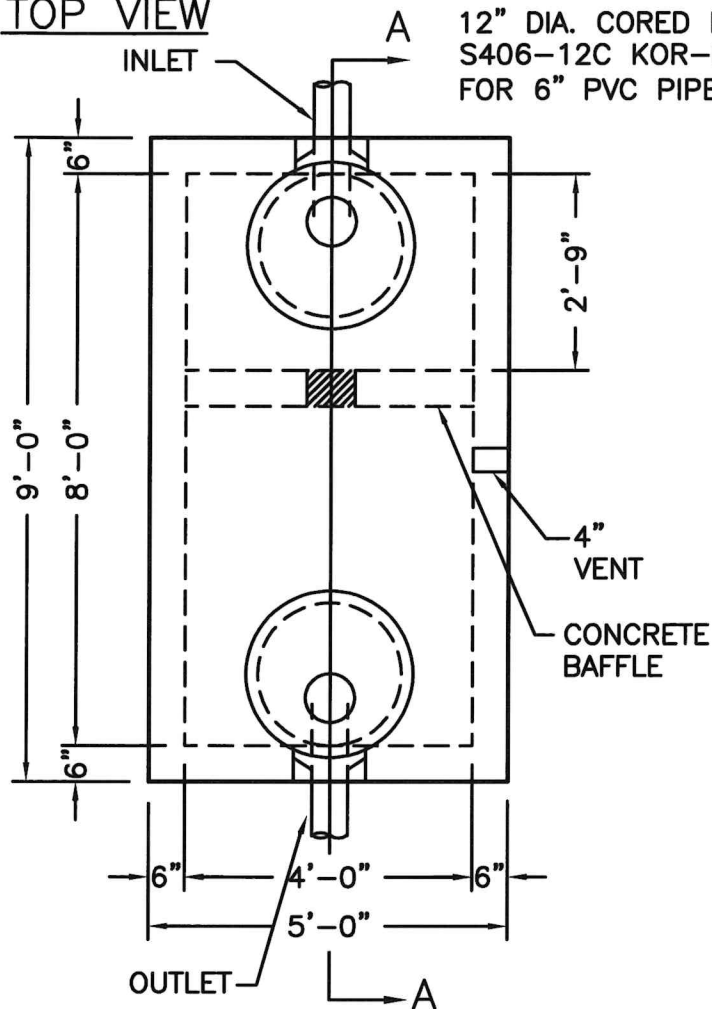

SECTION A-A

NOTES:

1. REINFORCED PRECAST CONCRETE SHALL HAVE A COMPRESSIVE STRENGTH OF 5000 PSI AT 28 DAYS, AND CONTAIN XYPEX WATERPROOFING ADMIXTURE.
2. CONCRETE REINFORCED TO MEET H-20 LOADING, #5 BARS AT 8" C-C, EACH WAY, CONTINUOUS AROUND CORNERS.
3. CONSTRUCTION JOINT TO BE SEALED WITH 1" CONSEAL CS-102 SEALANT.
4. VENT SHALL BE TERMINATED OUTSIDE AND ABOVE THE HIGHEST FLOOR DRAIN. THE VENT SHALL BE SITUATED SO THAT NO SURFACE WATER ENTERS.
5. ALL PVC PIPES SHALL CONFORM TO ASTM D3034.
6. ALL PIPE PENETRATIONS SHALL CONFORM TO ASTM C923 AND SHALL BE A-LOK, KOR-NSEAL OR APPROVED EQUAL.

7. BOTTOM OUTLET REQUIRED AS SHOWN TO PREVENT REMOVAL OF AN INTERNAL OUTLET TEE.

8. CLEANOUTS MUST BE INSTALLED TO FACILITATE BLOCKAGE REMOVAL IN EITHER DIRECTION.

(BASED ON MACK INDUSTRIES GREASE TRAP TANK)

1000 GALLON OIL & WATER SEPARATOR
STARK COUNTY

DRAWN BY: ARM

SCALE: 3/8"=1'-0"

DATE: 10/6/2015

REV: 5/01/2024